



DESCRIPTION

This series of Zener Diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 200mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

The M3Z2V4~M3Z75V are available in SOD-323 Package.

ORDERING INFORMATION

Package Type	Part Number
SOD-323	M3Z2V4
	M3Z2V7
	M3Z3V0
	M3Z3V3
	M3Z3V6
	M3Z3V9
	M3Z4V3
	M3Z4V7
	M3Z5V1
	M3Z5V6
	M3Z6V2
	M3Z6V8
	M3Z7V5
	M3Z8V2
	M3Z9V1
	M3Z10V
	M3Z11V
	M3Z12V
	M3Z13V
	M3Z15V
	M3Z16V
	M3Z18V
	M3Z20V
	M3Z22V
	M3Z24V
	M3Z27V
	M3Z30V
	M3Z33V
	M3Z36V
	M3Z39V
	M3Z43V
	M3Z47V
	M3Z51V
M3Z56V	
M3Z62V	
M3Z68V	
M3Z75V	
Note	3,000pcs / Reel
AiT provides all RoHS Compliant Products	

FEATURES

- Standard Zener Breakdown Voltage Range: 2.4V to 75V
- Steady State Power Rating of 200mW
- Maximum case temperature for soldering purposes: 260°C for 10 Seconds
- ESD Rating of Class 3(>16kV) per Human Body Model
- Available in SOD-323 Package

MECHANICAL CHARACTERISTICS

Case: Void-free, transfer-molded plastic

Finish: All external surfaces are corrosion resistant

Polarity: Cathode indicated by polarity band

Flammability Rating: UL94 V-0

Mounting Position: Any

Small Body Outline Dimensions:

0.067" x 0.049"(1.7 mm x 1.25 mm)

Low Body Height: 0.035" (0.9 mm)

Package Weight: 4.507 mg/unit

PIN DESCRIPTION





ABSOLUTE MAXIMUM RATINGS

T_A = 25°C unless otherwise noted


P _D , Total Device Dissipation FR-5 Board ^{NOTE1}	
@ T _A = 25°C	200mW
Derate above 25°C	1.5mW/°C
R _{θJA} , Thermal Resistance from Junction to Ambient	635°C/W
T _J , T _{STG} , Junction and Storage Temperature Range	-65°C to + 150°C

NOTE1: FR-4 Minimum Pad



ELECTRICAL PARAMETER

$T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{V Max.}$ @ $I_F = 10\text{mA}$ for all types

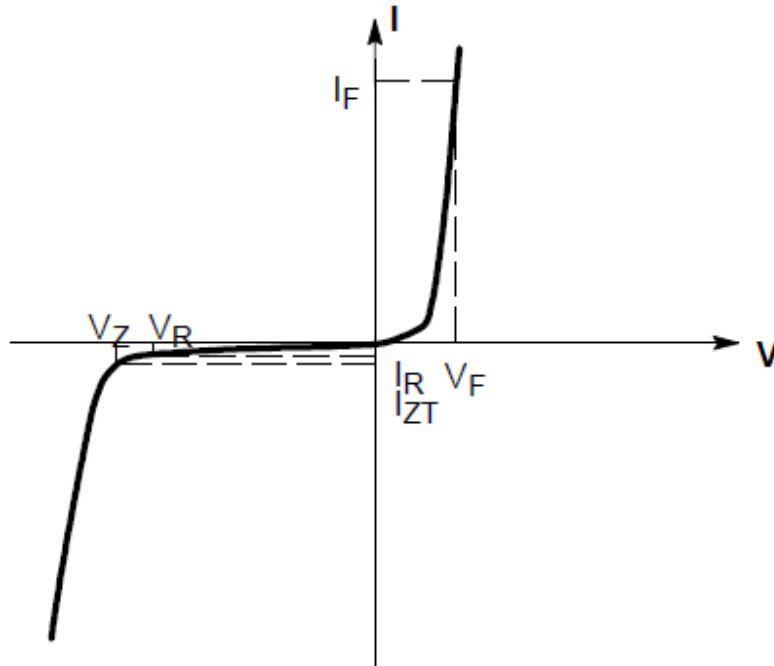

Zener Voltage Regulator

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Current
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
θ_{V_Z}	Maximum Temperature Coefficient of V_Z
C	Max. Capacitance @ $V_R = 0$ and $f = 1\text{MHz}$



ELECTRICAL CHARACTERISTICS

T_A = 25°C unless otherwise noted, V_F = 0.9V Max. @I_F = 10mA for all types.


Part Number	Zener Voltage ^{NOTE2}				Zener Impedance			Leakage Current		θV _Z (mV/k) @ I _{ZT}		C @V _R =0 f = 1MHz pF
	V _Z (Volts)			@I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @I _{ZK}		I _R @V _R		Min	Max	
	Min	Nom	Max	mA	Ω	Ω	mA	μA	Volts			
M3Z2V4	2.2	2.4	2.6	5	100	1000	0.5	50	1.0	-3.5	0	450
M3Z2V7	2.5	2.7	2.9	5	100	1000	0.5	20	1.0	-3.5	0	450
M3Z3V0	2.8	3.0	3.2	5	100	1000	0.5	10	1.0	-3.5	0	450
M3Z3V3	3.1	3.3	3.5	5	95	1000	0.5	5	1.0	-3.5	0	450
M3Z3V6	3.4	3.6	3.8	5	90	1000	0.5	5	1.0	-3.5	0	450
M3Z3V9	3.7	3.9	4.1	5	90	1000	0.5	3	1.0	-3.5	-2.5	450
M3Z4V3	4.0	4.3	4.6	5	90	1000	0.5	3	1.0	-3.5	0	450
M3Z4V7	4.4	4.7	5.0	5	80	800	0.5	3	2.0	-3.5	0.2	260
M3Z5V1	4.8	5.1	5.4	5	60	800	0.5	2	2.0	-2.7	1.2	225
M3Z5V6	5.2	5.6	6.0	5	40	700	0.5	1	2.0	-2.0	2.5	200
M3Z6V2	5.8	6.2	6.6	5	10	100	0.5	3	4.0	0.4	3.7	185
M3Z6V8	6.4	6.8	7.2	5	15	160	0.5	2	4.0	1.2	4.5	155
M3Z7V5	7.0	7.5	7.9	5	15	160	0.5	1	5.0	2.5	5.3	140
M3Z8V2	7.7	8.2	8.7	5	15	160	0.5	0.7	5.0	3.2	6.2	135
M3Z9V1	8.5	9.1	9.6	5	15	160	0.5	0.2	7.0	3.8	7.0	130
M3Z10V	9.4	10	10.6	5	20	160	0.5	0.1	8.0	4.5	8.0	130
M3Z11V	10.4	11	11.6	5	20	160	0.5	0.1	8.0	5.4	9.0	130
M3Z12V	11.4	12	12.7	5	25	80	0.5	0.1	8.0	6.0	10	130
M3Z13V	12.4	13.25	14.1	5	30	80	0.5	0.1	8.0	7.0	11	120
M3Z15V	14.3	15	15.8	5	30	400	0.5	0.05	10.5	9.2	13	110
M3Z16V	15.3	16.2	17.1	5	40	400	0.5	0.05	11.2	10.4	14	105
M3Z18V	16.8	18	19.1	5	45	400	0.5	0.05	12.6	12.4	16	100
M3Z20V	18.8	20	21.2	5	55	500	0.5	0.05	14.0	14.4	18	85
M3Z22V	20.8	22	23.3	5	55	500	0.5	0.05	15.4	16.4	20	85
M3Z24V	22.8	24.2	25.6	5	70	120	0.5	0.05	16.8	18.4	22	80
M3Z27V	25.1	27	28.9	2	80	300	0.5	0.05	18.9	21.4	25.3	70
M3Z30V	28	30	32	2	80	300	0.5	0.05	21.0	24.4	29.4	70
M3Z33V	31	33	35	2	80	300	0.5	0.05	23.2	27.4	33.4	70
M3Z36V	34	36	38	2	90	500	0.5	0.05	25.2	30.4	37.4	70
M3Z39V	37	39	41	2	130	500	0.5	0.05	27.3	33.4	41.2	45
M3Z43V	40	43	46	2	150	500	0.5	0.05	30.1	37.6	46.6	40
M3Z47V	44	47	50	2	170	500	0.5	0.05	32.9	42.0	51.8	40
M3Z51V	48	51	54	2	180	500	0.5	0.05	35.7	46.6	57.2	40
M3Z56V	52	56	60	2	200	500	0.5	0.05	39.2	52.2	63.8	40
M3Z62V	58	62	66	2	215	500	0.5	0.05	43.4	58.8	71.6	35
M3Z68V	64	68	72	2	240	500	0.5	0.05	47.6	65.6	79.8	35
M3Z75V	70	75	79	2	255	500	0.5	0.05	52.5	73.4	88.6	35

NOTE2: ZENER voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C.




TYPICAL PERFORMANCE CHARACTERISTICS


1. Effect of Zener Voltage on ZENER Impedance

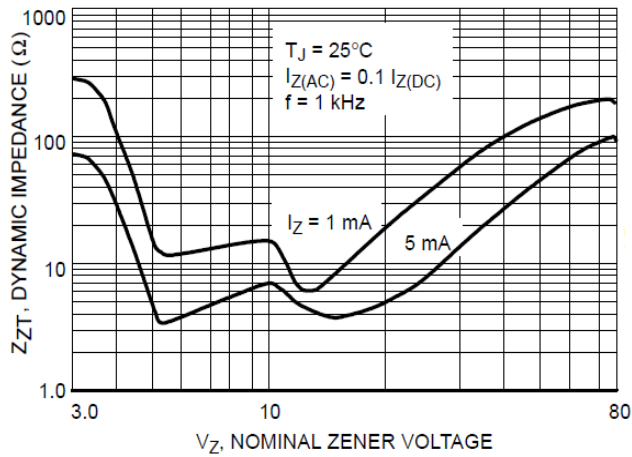


2. Typical Forward Voltage

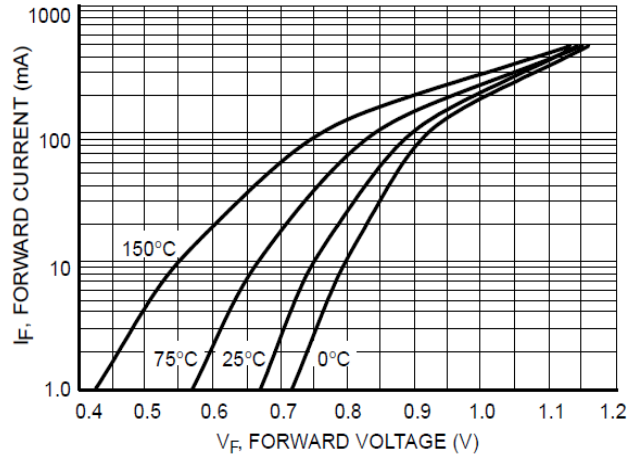

3. Typical Capacitance

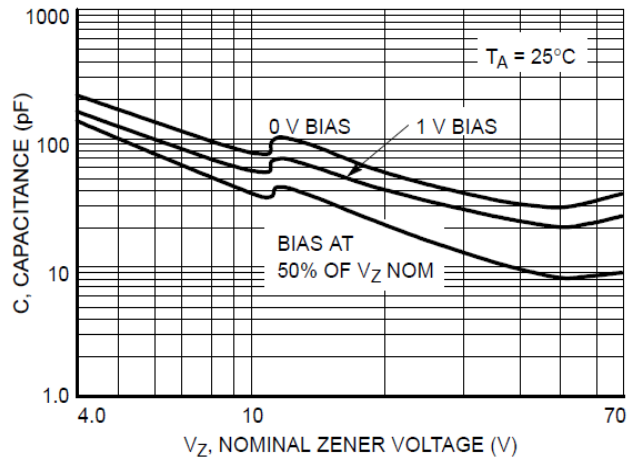


4. Typical Leakage Current

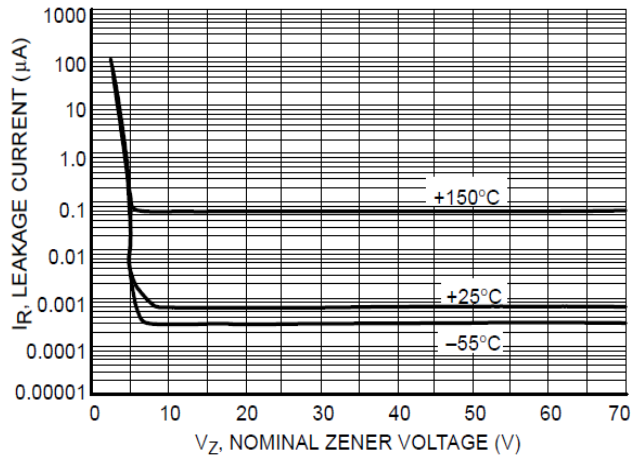





5. ZENER Voltage vs. Zener Current (V_Z Up to 12V)

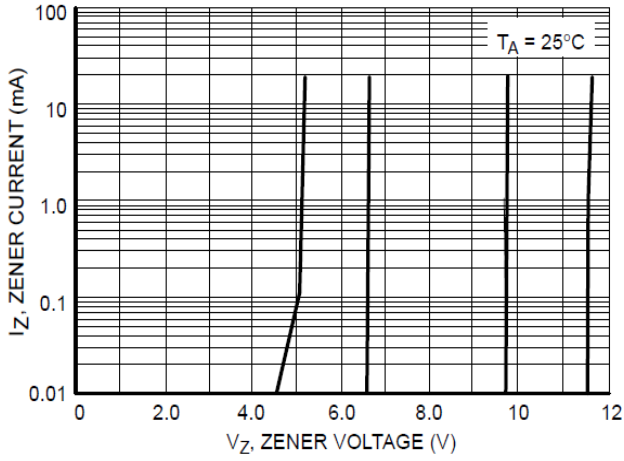

6. Zener Voltage vs. Zener Current (12V to 75V)

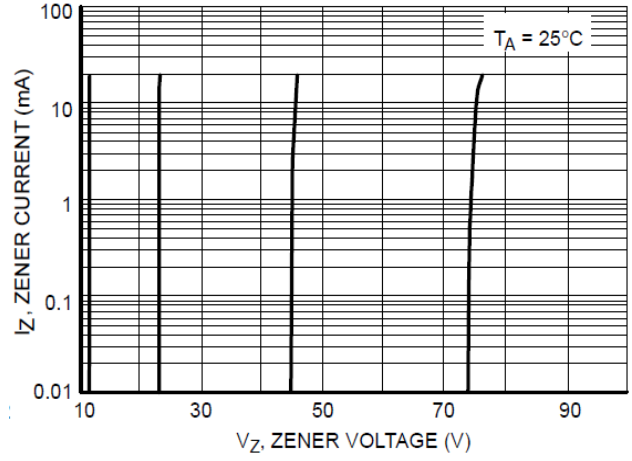




7. Steady State Power Derating

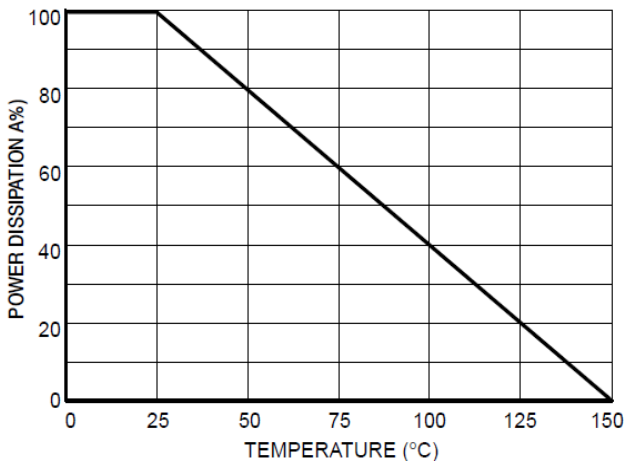



PACKAGE INFORMATION

Dimension in SOD-323 Package (Unit: mm)

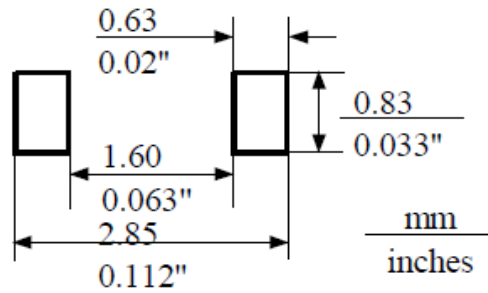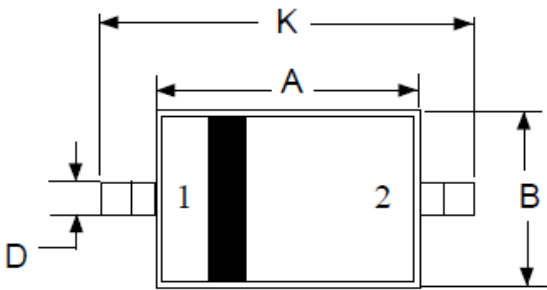

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	1.150	1.350	0.045	0.053
C	0.800	1.000	0.031	0.039
D	0.250	0.400	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.000	0.100	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.300	2.700	0.091	0.106



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.