



DESCRIPTION

The SM220B~SM2100B are available in SMB Package.

ORDERING INFORMATION

Package Type	Part Number
SMB	SM220B
	SM230B
	SM240B
	SM250B
	SM260B
	SM280B
	SM290B
	SM2100B
Note	SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

FEATURES

- For surface mount applications
- Metal-Semiconductor Junction with Guarding
- Epitaxial Construction
- Metal-Semiconductor Junction with Guarding
- Very Low forward voltage drop
- High Current capability
- For use in low voltage, high frequency inverters, Free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
- 250°C /10 seconds at terminals
- Available in SMB Package

APPLICATIONS

Case: Molded Plastic

Terminals: Solder Plated, Solderable per
MIL-STD-750 Method 2026

Polarity: Indicated by Cathode Band

Weight: 0.003ounce, 0.093gram



ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate by 20%.

Parameter Symbol	Symbol	SM 220B	SM 230B	SM 240B	SM 250B	SM 260B	SM 280B	SM 290B	SM 2100B	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	90	100	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	63	70	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	90	100	V
Maximum Average Forward Rectified Current at $T_L=105^\circ\text{C}$	$I_{(AV)}$	2.0								A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed On Rated Load (JEDEC Method)	I_{FSM}	50								A
Maximum Forward Voltage at 2.0A DC	V_F	0.55			0.75		0.85			V
Maximum DC Reverse Current at rated DC blocking voltage <small>NOTE1</small>	$T_A=25^\circ\text{C}$	0.5								mA
	$T_A=100^\circ\text{C}$	15								
Typical Junction Capacitance <small>NOTE1</small>	C_J	75								pF
Typical Thermal Capacitance <small>NOTE2</small>	$R_{\theta JA}$	15								$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to +125								$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150								$^\circ\text{C}$

NOTE1: Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

NOTE2: Thermal Resistance Junction to Lead.



TYPICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ unless otherwise noted

Figure. 1 Forward Current Derating Curve

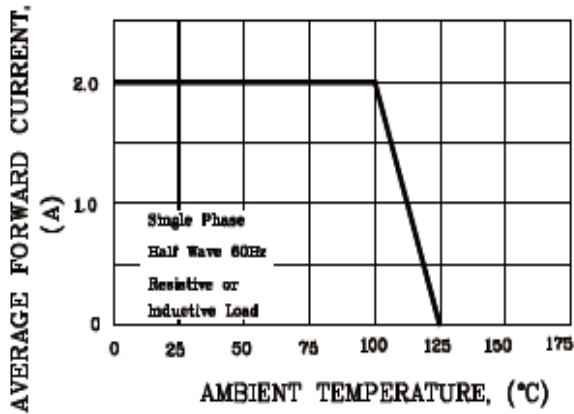


Figure. 3 Typical Instantaneous Forward Characteristics

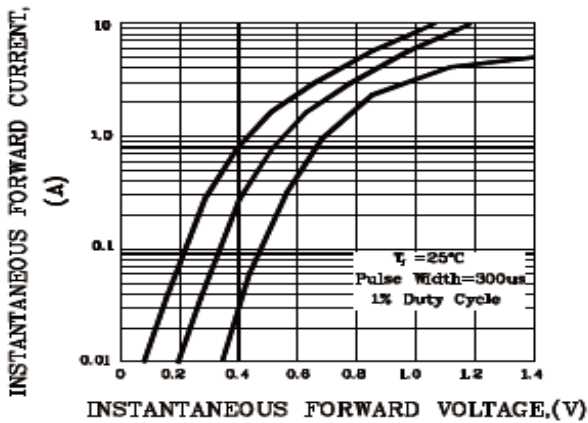


Figure. 5 Typical Reverse Characteristics

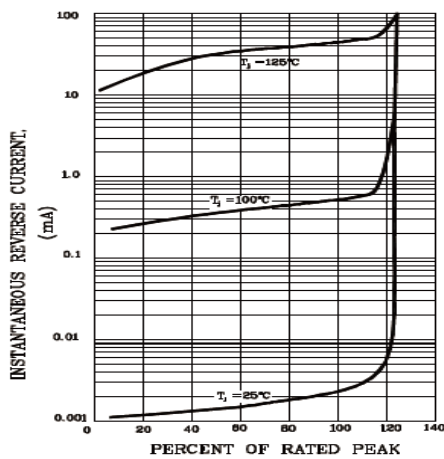


Figure. 2 Maximum Non-repetitive Surge Current


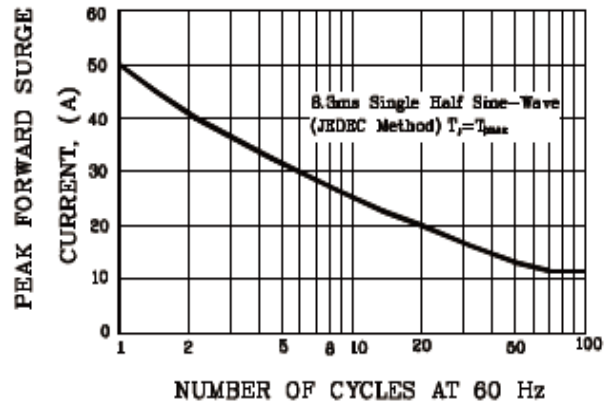



Figure. 4 Typical Junction Capacitance



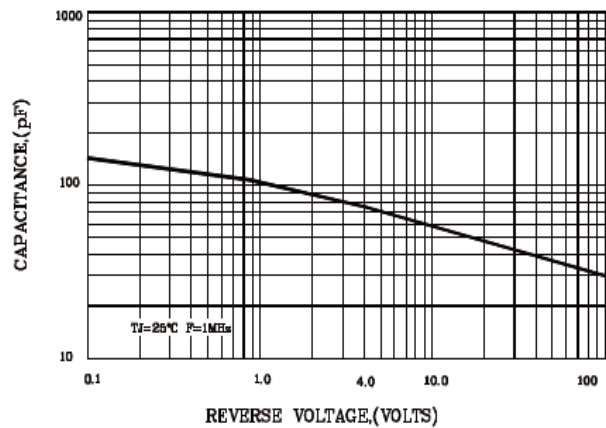

PACKAGE INFORMATION

Dimension in SMB Package (Unit: mm)

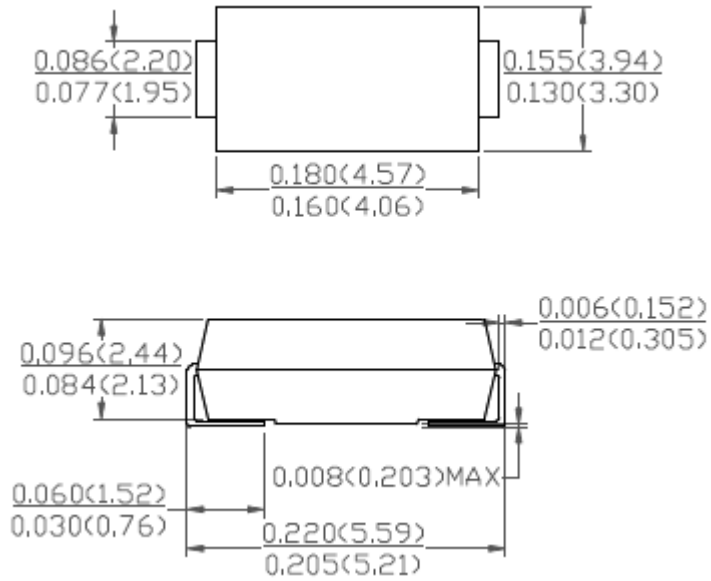



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.