



DESCRIPTION

The B5817W~B5819W are available in SOD-123 Package

FEATURES

- For use in low voltage, high frequency inverters
- Freewheeling, and polarity protection applications
- Available in SOD-123 Package

ORDERING INFORMATION

Package Type	Part Number
SOD-123	B5817W
	B5818W
	B5819W
Note	SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per
MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single diode @ $T_A=25^\circ\text{C}$

Parameter	Symbol	B5817W	B5818W	B5819W	Unit
Peak Repetitive Peak Reverse Voltage	V_{RRM}				
Working peak Reverse Voltage	V_{RWM}	20	30	40	V
DC Blocking Voltage	V_R				
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current	I_o	1.0			A
Peak Forward Surge Current @8.3ms	I_{FSM}	25			A
Repetitive Peak Forward Current	I_{FRM}	625			mA
Power Dissipation	P_D	250			mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500			K/W
Storage Temperature	T_{STG}	-65 ~150			$^\circ\text{C}$
Non-Repetitive Peak Reverse Voltage	V_{RM}	20	30	40	V

ELECTRICAL RATINGS

@ $T_A=25^\circ\text{C}$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=1\text{mA}$	B5817W	20		V
			B5818W	30		
			B5819W	40		
Reverse Voltage Leakage Current	I_R	$V_R=20\text{V}$	B5817W		1	mA
		$V_R=30\text{V}$	B5818W			
		$V_R=40\text{V}$	B5819W			
Forward Voltage	V_F	$I_F=1\text{A}$ $I_F=3\text{A}$	B5817W		0.45 0.75	V
			B5818W		0.55 0.875	
			B5819W		0.6 0.9	
Diode Capacitance	C_D	$V_R=4\text{V}, f=1.0\text{MHz}$			120	pF



TYPICAL CHARACTERISTICS

Figure. 1 Forward Current Derating Curve

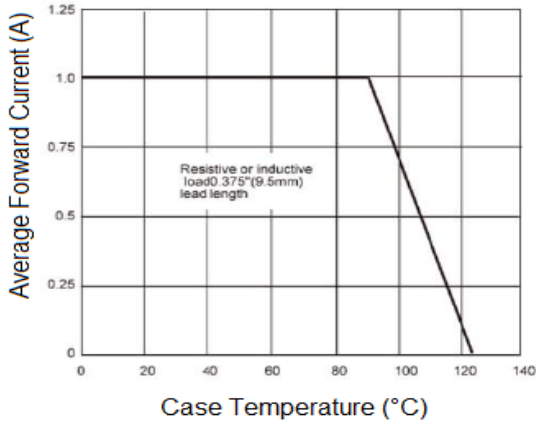


Figure. 2 Maximum Non-Repetitive Peak Forward Surge Current

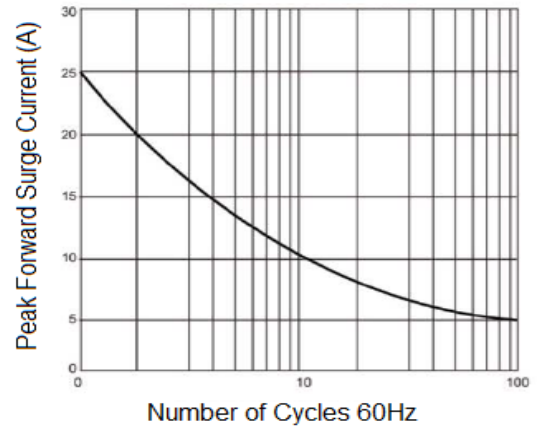


Figure. 3 Typical Instantaneous Forward Characteristic

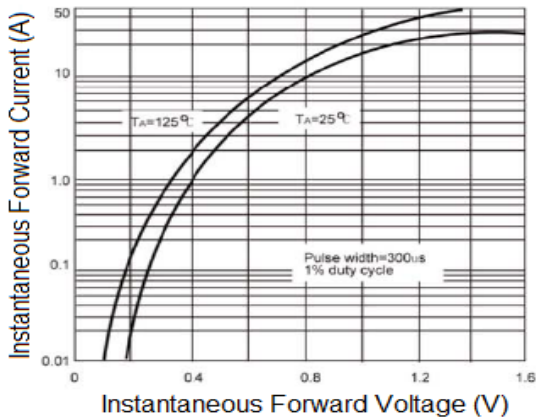


Figure. 4 Typical Reverse Characteristics

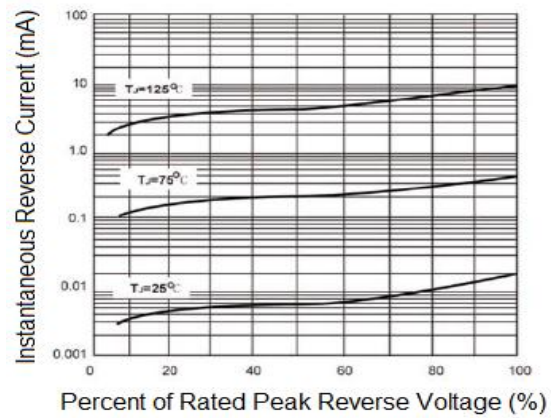


Figure. 5 Typical Junction Capacitance


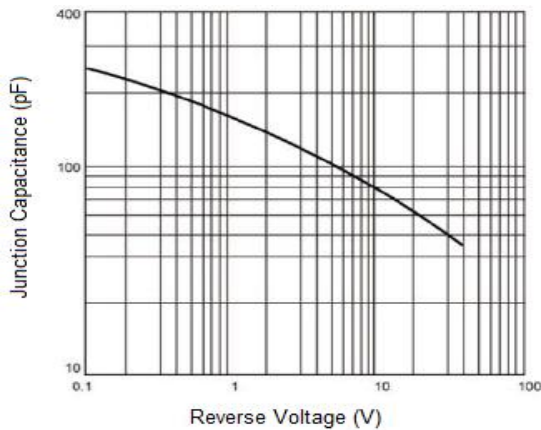



Figure. 6 Typical Transient Thermal Impedance



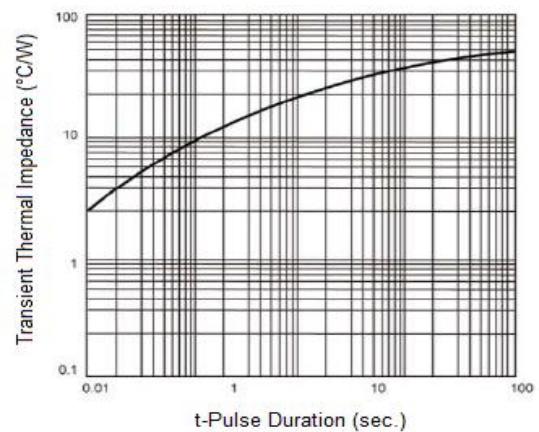

PACKAGE INFORMATION

Dimension in SOD-123 (Unit: mm)

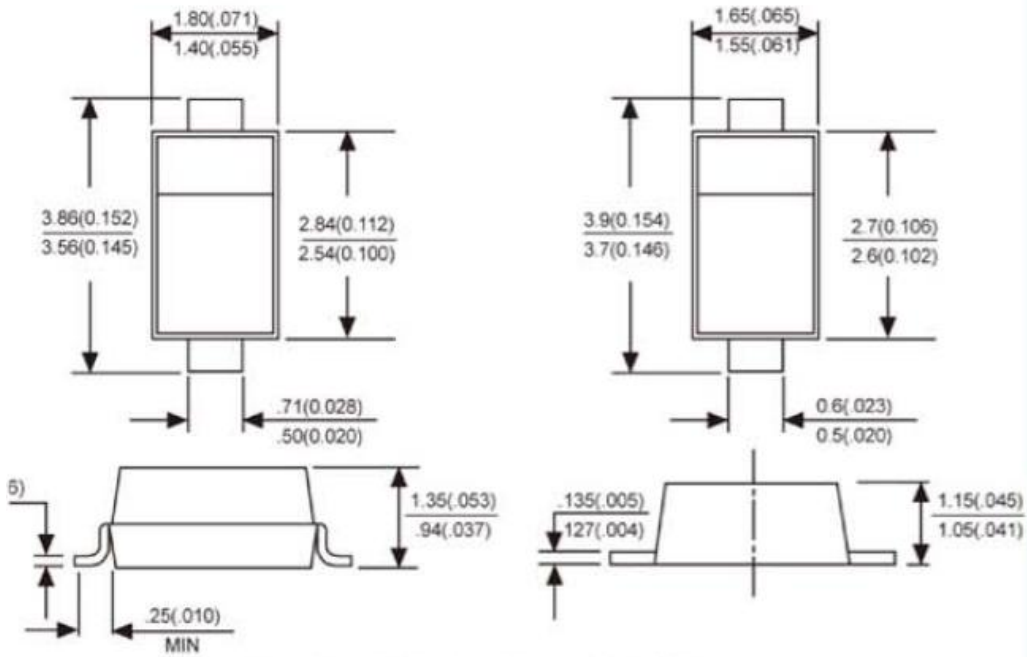

Dimensions in millimeters and (inches)



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.