



DESCRIPTION

The 1N5817~1N5819 are available in DO213-AA Package

ORDERING INFORMATION

Package Type	Part Number
DO213-AA	1N5817
	1N5818
	1N5819
Note	SPQ: 2,500pcs/Reel
AiT provides all RoHS Compliant Products	

FEATURES

- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Available in DO213-AA Package

MECHANICAL DATA

Case: MiniMELF (DO-213AA), molded plastic body

Terminals: Solder plated, solderable per

MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any



ABSOLUTE MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half-wave, resistive or inductive load. For capacitive load, derate by 20 %.

Parameter	Symbol	1N5817	1N5818	1N5819	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	V
Maximum RMS Voltage	V_{RMS}	14	21	28	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1.0			A
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	25			A
Maximum Instantaneous Forward Voltage	V_F	at $I_F=1A$ 0.45	0.55	0.6	V
		at $I_F=3A$ 0.75	0.875	0.9	
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage ^{NOTE1}	I_R	$T_A=25^{\circ}C$ 0.5	1.0		mA
		$T_A=100^{\circ}C$ 1.0			
Typical Junction Capacitance ^{NOTE2}	C_J	110			pF
Typical Thermal Resistance, Junction to Ambient ^{NOTE3}	$R_{\theta JA}$	75			°C/W
Typical Thermal Resistance, Junction to Terminal ^{NOTE4}	$R_{\theta JL}$	30			
Operating Junction Temperature Range	T_J	-55 ~+125			°C
Storage Temperature Range	T_{STG}	-55 ~+150			°C

NOTE1: Pulse test: 300us pulse width, 1% duty cycle

NOTE2: Measured at 1 MHz and reverse voltage of 4V

NOTE3: Thermal resistance junction to ambient 0.24" x 0.24"(6 x 6 mm) copper pads to each terminals

NOTE4: Thermal resistance junction to terminal 0.24" x 0.24"(6 x 6 mm) copper pads to each terminals



TYPICAL CHARACTERISTICS

Figure. 1 Forward Current Derating Curve

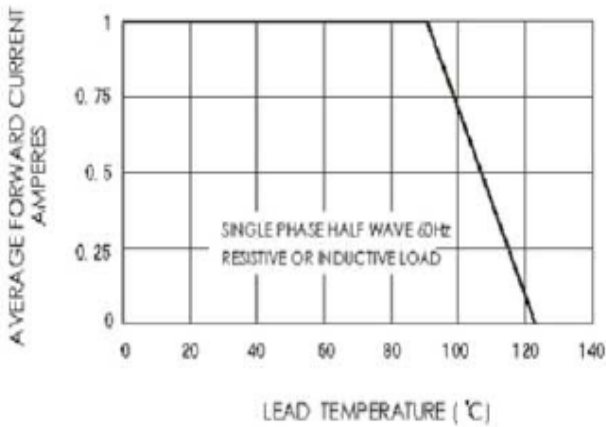


Figure. 2 Maximum Non-Repetitive Peak Forward Surge Current

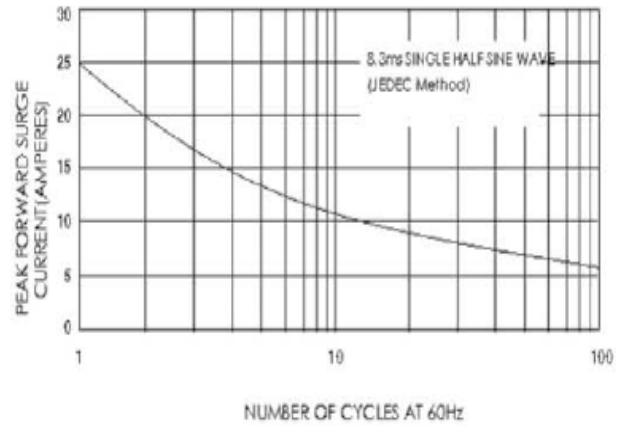


Figure. 3 Typical Instantaneous Forward Characteristics

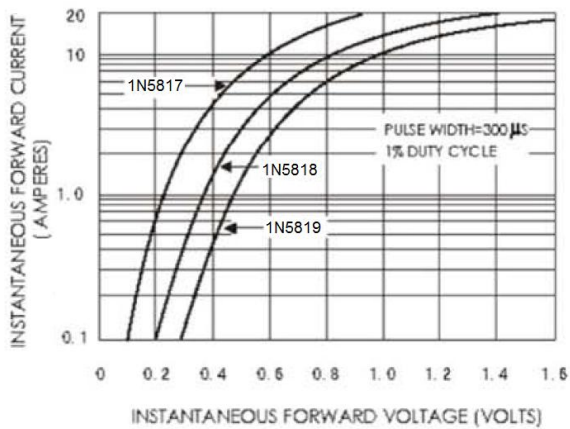


Figure. 4 Typical Reverse Characteristics


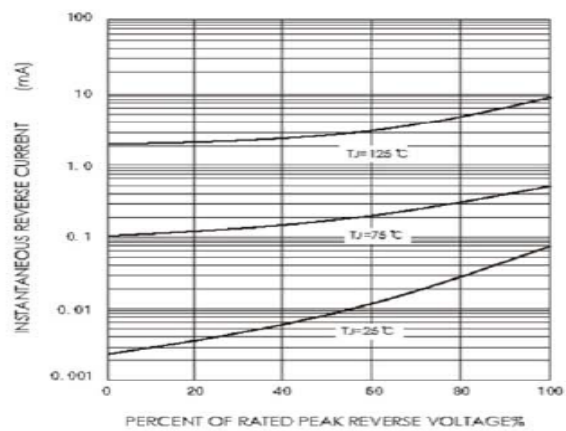



Figure. 5 Typical Junction Capacitance



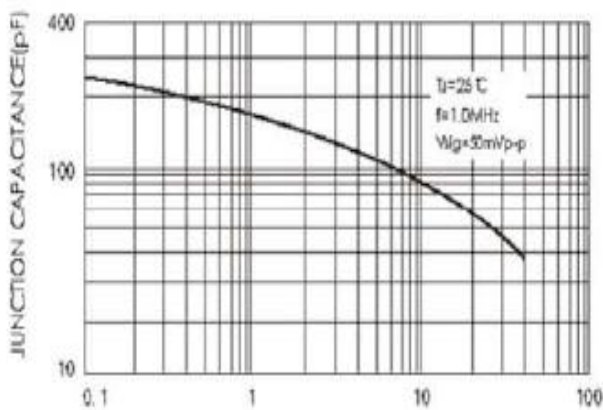

PACKAGE INFORMATION

Dimension in DO-213AA (Unit: mm)

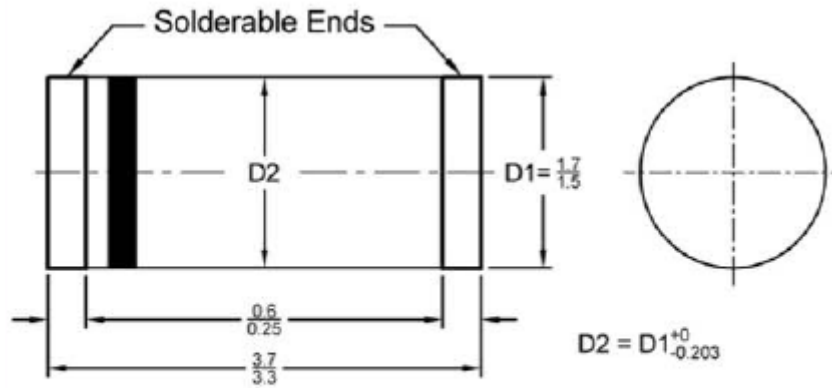

Dimensions in millimeters
MiniMELF



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or servers property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.